SHENGHANG

盛航农业机械

SHENGHANG MACHINERY

合作·共赢·创新·发展

PRODUCT CATALOGUE







盛航农业机械制造有限公司

地址：山东省济宁市梁山县

电话/WhatsApp：+86 133 8469 2372

网址：www.shfarmmachinery.com

SHENGHANG AGRICULTURAL MACHINERY MANUFACTURING CO., LTD.

Address: Liangshan County, Jining City, Shandong Province, China

Tel / WhatsApp: +86 133 8469 2372

Website: www.shfarmmachinery.com

盛航农业机械制造有限公司

Shenghang Agricultural Machinery Manufacturing Co., Ltd.

公司简介

盛航农业机械制造有限公司位于山东省济宁市梁山县，专业从事拖拉机及各类农机具的供应与出口。公司产品涵盖圆盘耙、圆盘犁、铧式犁、翻转犁、中耕机、深松机、起垄机、旋耕机、播种机、割草机、撒肥机、喷雾机、马铃薯收获机、农用拖车，以及犁片、耙片、松土铲等配件。

我们可根据客户提供的图纸、样品或技术要求进行定制生产（OEM），并通过海运、空运和铁路运输将产品发往世界各地。公司秉承“品质第一、客户至上”的理念，热忱欢迎国内外客户来电咨询、洽谈合作。

Company Introduction

Shenghang Agricultural Machinery Manufacturing Co., Ltd. is located in Liangshan County, Jining City, Shandong Province, China. We specialize in supplying and exporting tractors and a full range of agricultural implements, including disc harrows, disc ploughs, moldboard ploughs, reversible ploughs, cultivators, subsoilers, ridgers, rotary tillers, seeders and planters, mowers, fertilizer spreaders, sprayers, potato harvesters, farm trailers, and spare parts such as plough discs, harrow discs and cultivator sweeps.

We offer custom (OEM) production according to customers' drawings, samples or technical requirements, and deliver worldwide by sea, air and rail. Guided by the principle of "Quality First, Customer Foremost", we warmly welcome customers from home and abroad to contact us.











圆盘犁 | SINGLE WAY DISC PLOUGH

单向圆盘犁是与拖拉机全悬挂连接配套，作业时犁片旋转运动，对土壤进行耕翻作业。具有不缠草，不阻塞，不雍土，能够切断作物茎杆、根茎，工作阻力较小等优于铧式犁的特点，特别适用于杂草丛生，茎杆林立，土壤比阻较大，土壤中有砖石碎块等条件复杂农田的耕地作业。

The Single-way disc plough is matched with four-wheel tractor, the discs of plough are revolving to furrow the land during operation. The mounted disc plow is especially suitable for cultivation on the land which have weeds, stems and frictional soil with small brick etc .







型号 Model	1LYQ-220	1LYQ-320	1LYQ-420	1LYQ-520	1LY(T)-325	1LY(T)-425	1LY(T)-525	1LY(T)-625
耕幅 Working Width (mm)	400	600	800	1000	750	1000	1250	1500
耕深 working Depth(mm)	200				250~300			
犁片直径 Disc Dia (mm)	510	510	510	510	660			
犁片数量 Disc Qty	2	3	4	5	3	4	5	6
重量 Weight (kg)	140	190	240	300	420	490	560	640
配套马力 Tractor power (hp)	18	25-40	40	50-70	50-75	80-110	120	160
挂接方式 Linkage	I类三点悬挂Cat I Mounted				II 类三点悬挂 Cat II Mounted			

圆盘犁 | MF DISC PLOUGH

本款圆盘犁是与拖拉机全悬挂连接配套，作业时犁片旋转运动，对土壤进行耕翻作业。具有不缠草，不阻塞，不雍土，能够切断作物茎杆、根茎，工作阻力较小等优于铧式犁的特点，特别适用于杂草丛生，茎杆林立，土壤比阻较大，土壤中有砖石碎块等条件复杂农田的耕地作业。

MF Disc plough is matched with four-wheel tractor, the discs of plough are revolving to furrow the land during operation. The mounted disc plow is especially suitable for cultivation on land which have weeds, stems and frictional soil with small brick etc.





型号 Model	1LYX-225	1LYX-325	1LYX-425	1LYX-525
工作宽度 Working Width (mm)	500	750	1000	1250
工作深度 Working Depth(mm)	250~300			
犁片直径 Disc Dia (mm)	660			
犁片数量 Disc Qty	2	3	4	5
重量 Weight (kg)	270	360	470	560
配套马力 Tractor power (hp)	40	60	100	130
挂接方式 Linkage	II 类三点悬挂 Cat II Mounted			

圆盘犁 | FISH DISC PLOUGH

此系列圆盘犁是借鉴国外盘犁的特点进行专项设计、制造,同拖拉机全悬挂连接配套，作业时犁片旋转运动，对土壤进行耕翻作业。具有犁片入角度可调节，不缠草，不阻塞，不雍土，能够切断作物茎杆的特点，特别适用于杂草丛生，茎杆林立，土壤比阻较大，土壤中有砖石碎块等条件复杂农田的耕地作业，

1LY series disc plough is specially designed and manufactured borrowing the features of disc plough abroad.It is fully mounted with 4- wheel tractor .The discs of plough are revolving to furrow the land during operation. The mounted disc plow is especially suitable for cultivation on land which have weeds, stems and frictional soil with small brick etc.





型号 Model	1LY-2	1LY-3	1LY-4	1LY-5
工作宽度 Working Width (mm)	600	900	1200	1500
工作深度 Working Depth(mm)	250~300			
犁片直径 Disc Dia (mm)	660			
犁片数量 Disc Qty	2	3	4	5
重量 Weight (kg)	350	400	470	560
配套马力 Tractor power (hp)	40	60	80	120
挂接方式 Linkage	II 类三点悬挂 Cat II Mounted			

圆盘犁 | DISC PLOUGH

此系列圆盘犁是根据国外客户要求专门设计、制造的,同拖拉机全悬挂连接配套，作业时犁片旋转运动，对土壤进行耕翻作业。具有犁片入角度可调节，不缠草，不阻塞，不雍土，能够切断作物茎杆的特点，适合各种类型的土壤耕翻作业。

This series disc plough is specially designed and manufactured borrowing the features of disc plough abroad.It is fully mounted with 4- wheel tractor .The discs of plough are revolving to furrow the land during operation. The mounted disc plow is especially suitable for cultivation on land which have weeds, stems and frictional soil with small brick etc





型号 Model	Unit	1LY-225F	1LY-325F	1LY-425F	1LY-525F
犁片数量 Disc qty		2	3	4	5
犁片直径 Disc dia.	mm	660	660	660	660
工作深度 Working depth	mm	250-300			
工作宽度 Working width	mm	500	750	1000	1250
整机重量 Total weight	Kg	300	420	520	650
配套马力 Tractor power (hp)	hp	25~30	35~50	60~80	80~90
挂机方式 Linkage		Mounted CAT II			

液压双向圆盘犁 | HYDRAULIC REVERSIBLE DISC PLOUGH

本系列双向圆盘犁为水平摆式结构，适用于旱作区熟地的耕翻作业。特点是工作部件滚动前进，与土壤的磨擦阻力小，不易缠草、堵塞，圆盘刃口长、耐磨性好，较易入土，耕后地表平整，且具有地头空行程短、生产效率高、省油等特点。对梯田和小块作业区的耕作有更好的适应性。

This series reversible disc plough is constructed to be level swing. It’s suitable for plowing up the dry cultivated land. The discs are rotating forward during work, so the friction from soil is small and the discs are not easy to be wrapped and blocked up by grasses. With the long edge and the good wearing resistance of the discs, it’s easy to plough into the soil and the land surface is level after plowing. The productivity is high and the oil consumption is low. The machine has noticeable advantages for working on the terraced field and small block field.







型号 Model	1LY(SX)-325	1LY(SX)-425	1LY(SX)-525
工作宽度 Working Width (mm)	750	1000	1250
工作深度 Working Depth(mm)	250~300		
犁片直径 Disc Dia (mm)	660		
犁片数量 Disc Qty	3	4	5
重量 Weight (kg)	600	720	820
配套马力 Tractor power (hp)	50	90~120	130~150
挂接方式 Linkage	II 类三点悬挂 Cat II Mounted		

水田犁 | PADDY DISC PLOUGH

该系列圆盘犁是我公司根据东南亚地区土壤中水分较大和地表杂草较多的特点进行的设计，具有入土角度合理，不雍土，不阻塞，不缠草的特点。特别适用于杂草丛生，土壤中有砖石碎块等条件复杂农田的耕地作业。

1LYT Series paddy field disc plough is designed according to the feature of soil with moisture and more weeds in Southeast Asia ,especially suitable for cultivation in the land with more weeds and bricks.





型号 Model	工作宽度 Working Width (mm)	工作深度 Working Depth(mm)	犁片直径 Disc Dia (mm)	犁片数量 Disc Qty	重量 Weight (kg)	配套马力 Tractor power (hp)	挂接方式 Linkage
1LYT-522	1200	140-180	560	5	265	30	Mounted
1LYT-622	1400	140-180	560	6	295	45	Mounted
1LYT-524	1200	150-200	610	5	400	60-80	Mounted
1LYT-624	1400	150-200	610	6	430	70-90	Mounted
1LYT-724	1680	150-200	610	7	450	90-100	Mounted
1LYT-526	1300	180-220	660	5	530	60-80	Mounted
1LYT-626	1650	180-220	660	6	565	70-90	Mounted
1LYT-726	1900	180-220	660	7	580	90-100	Mounted
1LYT-826	2150	180-220	660	8	610	110-130	Mounted

手扶圆盘犁 | DISC PLOUGH FOR WALKING TRACTOR

本款圆盘犁是与手扶拖接机全悬挂连接配套，特别适用于杂草丛生，茎杆林立，土壤比阻较大，土壤中有砖石碎块等条件复杂农田的耕地作业。

This disc plough is completely mounted with walking tractor during operation, It is suitable for operation on the field with grasses,straw and stems of crops or plants,big soil resistance and with many stones and bricks etc in the field.





型号 Model	1LS-220Y	1LS-220T
工作宽度 Working Width (mm)	400	400
工作深度 Working Depth(mm)	120-180	120-180
犁片直径 Disc Dia (mm)	410	400
犁片数量 Disc Qty	2	2
重量 Total Weight (kg)	65	75
配套马力 Tractor power (hp)	**8-18hp walking tractor**	
挂接方式 Linkage	Tractor Traction	

圆盘重耙 | HEAVY DUTY HYDRAULIC DISC HARROW

1BZ系列液压偏置重耙对粘重土壤、荒地和杂草多的地块具有很强的耕作能力，主要适用于农田耕前灭茬，破除地表板结，秸杆切碎还田，耕后碎土，平整保墒等项工作，重型圆盘耙在熟地上亦可代替犁进行土壤耕翻作业。

1BZ series of Hydraulic offset heavy disc harrow is well suitable for heavy clay soil, waste land and weedy field as well, mainly suitable for stubble cleaning before farming , it can break the hardened soil and return the chopped straw to the soil, and also can crash the soil after tillage and level the land. The heavy-duty disc harrow can cultivate the soil instead of plow.



型号 Model	1BZ-1.8	1BZ-2.2	1BZ-2.5	1BZ-3.0	1BZ-3.4	1BZ-4.0	1BZ-5.3
工作宽度 Working Width (mm)	1800	2200	2500	3000	3400	4000	5300
工作深度 Working Depth (mm)	200						
耙片直径 Disc Dia. (mm)	660						
耙片数量 Disc Qty	16	20	24	28	32	36	48
整机重量 Weight (kg)	1160	1250	1350	1430	1550	1900	2500
配套马力 Tractor power (hp)	70	80	90	100	120	150	180
选装配置 Items Optional	密封式轴承组合 Sealed Bearing Assembly						

加重圆盘耙 | EXTRA HEAVY DISC HARROW



型号 Model	1BZLY-2.0	1BZLY-2.2	1BZLY-2.5	1BZLY-Y3.0	1BZLY-3.4
工作宽度 Working width (mm)	2000	2200	2500	3000	3400
工作深度 Working depth (mm)	180-220				
耙片数量 Disc Qty	18	20	24	28	32
耙片直径 Disc Dia.(mm)	660				
整机重量 Total weight (kg)	1600	1780	1950	2100	2500
配套马力 Tractor Power (hp)	80	90	110	120	140
挂接类型 Linkage	Trailed				
选装配置 Items Optional	38mm 圆轴配套注油轴承组合或 40mm 方轴配套黄油轴承组合 38mm Round Shaft With Oil Bearing or 40mm Square Shaft with Grease Bearing				

圆盘耙（悬挂中耙) | MOUNTED MIDDLE DUTY DISC HARROW

1BJX 系列悬挂中耙适用于耕后碎土，播前整地，土肥混合和轻中质土壤的灭茬作业。该机具有结构简单，坚固耐用，使用方便，保养宜行，入土碎土能力良好，耙后地表平整能满足精耕细作的农艺要求。

Mounted middle duty disc harrow is used in open field working for the superficial ploughing, for the shattering of clods, preparation of soil for sowing, burial of organic substances and remains. It can be used in light and medium soil





型号 Model	1BJX-1.6	1BJX-1.8	1BJX-2.0	1BJX-2.2	1BJX-2.4	1BJX-2.5
工作宽度 Working Width (mm)	1600	1800	2000	2200	2400	2500
工作深度 Working Depth (mm)	140					
耙片直径 Disc Dia.(mm)	560					
耙片数量 Disc Qty	14	16	18	20	22	24
整机重量 Total Weight (kg)	350	380	420	470	540	650
配套马力 Tractor power (hp)	30	40	50	60	70	80
挂接方式 Linkage	II 类三点悬挂 Mounted Cat II					
选装配置 Items Optional	密封式轴承组合 Sealed Bearing Assembly					

牵引/悬挂式中耙系列 | COMPACT MODEL DISC HARROW

该系列圆盘耙是我司根据国外客户要求设计研发，该机与四轮拖拉机配套，可通过悬挂或者牵引两种不同的方式与拖拉机连接，具有作业效率高、功率利用合理，入土、碎土能力较强，耙后地表平整、土壤松碎，对粘重土壤、荒地和杂草多的地块具有较强的适应能力的特点。

Compact Model Disc Harrow is used in open field working for the superficial ploughing, for the shattering of clods, preparation of soil for sowing, burial of organic substances and remains. It can be used in both forms i.e. mounted as well as trailed.





型号 Model	1BJX-1.4A	1BJX-1.6A	1BJX-1.8A	1BJX-2.0A	1BJX-2.3A	1BJX-2.5A	1BJX-2.7A
工作宽度 Working Width (mm)	1400	1600	1800	2000	2300	2500	2700
工作深度 Working Depth (mm)	140						
耙片直径 Disc Dia.(mm)	560/610						
耙片数量 Disc Qty	12	14	16	18	20	22	24
整机重量 Weight (kg)	440	490	550	590	620	650	720
配套马力 Tractor power (hp)	30	40	50-60	60-70	70-80	80-100	90-110
挂接方式 Linkage	II 类三点悬挂/牵引 Mounted Cat II						

圆盘耙（悬挂轻耙）| MOUNTED LIGHT DUTY DISC HARROW

1BQX系列悬挂轻耙主要适用于农田的耕后碎土、播前整地、疏松土壤、土肥混合和轻质土壤的灭茬作业。该机具有结构合理、 坚固耐用、 使用方便、保养易行、碎土能力强、耙后地表平整的特点

Mounted light duty disc harrow is used in open field working for the superficial ploughing, for the shattering of clods, preparation of soil for sowing, burial of organic substances and remains. It can be used in light and medium soil.





型号 Model	1BQX-1.1	1BQX-1.3	1BQX-1.5	1BQX-1.7	1BQX-1.9	1BQX-2.3
工作宽度 Working Width (mm)	1100	1300	1500	1700	1900	2300
工作深度 Working Depth (mm)	120					
耙片直径 Disc Dia.(mm)	460					
耙片数量 Disc Qty	12	14	16	18	20	24
整机重量 Weight (kg)	200	220	240	260	310	360
配套马力 Tractor power (hp)	15	18	25	40	50	60
挂接方式 Linkage	I 类三点悬 Mounted Cat I			II 类悬挂 Mounted Cat II		

对置式轻耙系列 | OPPOSED LIGHT DISC HARROW

对置式圆盘耙主要适用于农田耕前灭茬，破除地表板结，耕后碎土，平整保墒等项工作。具有作业效率高、功率利用合理，入土、碎土能力较强，拖拉机无偏牵引的特点。

1BQD Series Opposed disc harrow is mainly for the cleaning stubble before tillage, breaking the hardened surface ,soil pulverization and leveling .




型号 Model	1BQDX-1.3	1BQDX-1.6	1BQDX-2.0	1BQDX-2.4	1BQDX-2.8	1BQDX-3.0
工作宽度 Working Width (mm)	1300	1600	2000	2400	2800	3000
工作深度 Working Depth (mm)	140					
耙片直径 Disc Dia.(mm)	460					
耙片数量 Disc Qty	16	20	24	28	32	36
整机重量 Weight (kg)	330	390	460	560	600	650
配套马力 Tractor power (hp)	35-40	40-45	50-60	60-75	75-85	85-100
挂接方式 Linkage	三点悬挂3 Point Mounted					

联合整地机 | COMBINED LAND PREPARATION MACHINE

联合整地机能一次完成耕后碎土、疏松土壤、土肥混合、播前整平、镇压等作业，直接备好平坦苗床，可以提高效率，降低作业成本，而且，根茬粉碎还田以后，可以提高土壤有机质含量，改善土壤结构，起到培肥地力、提高粮食产量的作用，

The combined land preparation machine can complete the operations of breaking soil after ploughing, loose soil, mixing soil and fertilizer, leveling before sowing, crushing, etc. , and directly prepare the flat seedbed, which can improve the efficiency and reduce the operation cost, after the stubble is crushed and returned to the field, it can increase the content of soil organic matter, improve the soil structure, improve soil fertility and increase grain yield.



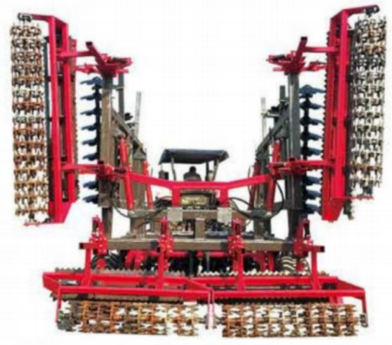

型号 Model	1LZ-3.2	1LZ-4.0Y	1LZ-4.80Y	1LZ-6.0Y	1LZ-7.0Y
工作宽度 Width of cut (mm)	3200	4000	4800	6000	7000
工作深度 Depth of cut (mm)	80-140				
耙片直径 Dia of disc (mm)	460				
耙片间距 Disc Spacing(mm)	200				
耙片数量 Q' ty of dis :	32	40	48	60	69
重量 Weight (hp)	2350	2680	3320	4360	5800
配套马力 Tractor power (hp)	100-120	120-140	140-170	180-200	>200
选装配置 Items Optional	耙片 560/660 Harrow discs 560/660				

铧式犁 | MOLDBO RD OW

铧式犁是与四轮拖拉机配套的全悬挂式铧式，主要适用于沙壤土地和熟地旱田的耕翻作业。该系列铧式犁具有调节简单、耕作。适应范围广、作业质量好、耕后地表平整的特点。

1L series share plow is a four-wheel tractor mounted plow, mainly used for plowing loam, the sand loam , cultivated and dry land.




型号 Model	1L-220	1L-320	1L-420	1L-520	1L-225	1L-325	1L-425	1L-525	1L-330	1L-430	1L-530	1L-335	1L-435	1L-535
工作宽度 Working Width (mm)	400	600	800	1000	500	750	1000	1250	900	1200	1500	1050	1400	1750
工作深度 Working Depth (mm)	200~250								220-270					
数量 No.Of Bodies	2	3	4	5	2	3	4	5	3	4	5	3	4	5
重量 Total Weight (kg)	64	100	130	170	125	170	240	270	230	330	420	300	470	520
配套马力 Tractor power (hp)	15~25	25~35	35~45	50~60	25	40	50	60	50	70	80	75	90	110
挂接方式 Linkage	三点悬挂 Three point mounted								Ⅱ类三点悬挂 CatⅡ					

液压翻转犁 | HYDRAULIC MOLDBOARD PLOW

1LF系列翻转犁是同四轮拖拉机配套的全悬挂式液压翻转犁，适用砂土壤和旱田熟地耕翻作业，可进行梭式双向作业，耕后地表面平整，具有地头空转行程少，作业效率高等特点。

1LF hydraulic reversible plow is mounted with four-wheel tractor; t is used for the loam, sand soil , cultivated and dry land ,it can finish the furrowing work in double way.

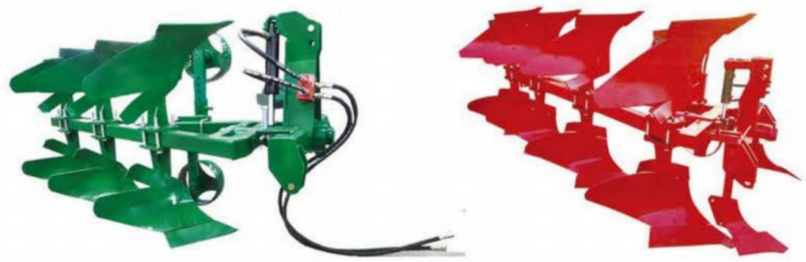


型号 Model	1LF-225	1LF-325	1LF-425	1LF-525	1LF-330	1LF-430	1LF-530	1LF-335	1LF-435	1LF-535
工作宽度 Working Width (mm)	500	750	1000	250	900	1200	1500	1050	1400	1750
工作深度 Working Depth (mm)	220~270				250~300			300~500		
犁体数量 No. Of bodies	4	6	8	10	6	8	10	6	8	10
重量 Total Weight (kg)	330	400	530	650	680	780	880	700	840	960
配套马力 Tractor power (hp)	25-35	35-55	60-80	80-90	50-70	60-80	90-120	70-80	80-100	100-120
挂接方式 Linkage	Ⅱ类三点悬挂 Mounted Cat Ⅱ									

栅条翻转犁 | HYDRAULIC REVERSIBLE MOLDBOARD PLOW WITH SLATTED BODIES

栅条翻转犁相对于镜面犁，因为犁壁呈栅栏状，耕地时,土垡与犁壁接触面小,易脱土,可减轻作业阻力。调节栅条间相对位置,可改变犁体扭曲程度,从而改变犁的翻土、碎土性能。适于潮湿土壤和水田耕作,不宜用于沙土地。

Compared with the normal moldboard plough, this plough uses the slatted mould board which reduces its contact surface with soil during operation and makes it easy to remove the soil ,Thus reduce the working re sistance. Adjust the relative location among the grid bars and it will change the distortion degree of the plow body and then improve the performance of soil tillage and crushing .It is suitable for cultivation on wet soil and paddy field and not suitable for sandy land.



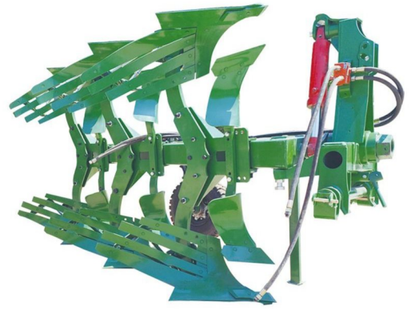


型号 Model	工作宽度 Working Width (mm)	工作深度 Working Depth (mm)	犁体数量 No. Of bodies	重量 Total Weight (kg)	配套马力 Tractor power (hp)	挂接方式 Linkage
1SLF-225	500	220-270	4	250	25-35	三点悬挂 3 Point Mounted
1SLF-325	750		6	320	35-55	
1SLF-425	1000		8	400	60-80	
1SLF-525	1250		10	500	80-90	
1SLF-330	900	250-300	6	470	60-90	
1SLF-430	1200		8	700	90-110	
1SLF-530	1500		10	1000	110-150	
1SLF-335	1050	350-450	6	1000	90-100	
1SLF-435	1450		8	1300	100-150	
1SLF-535	1550		10	1800	120-180	

钢板铧式犁 | MOULDBOARD PLOW

该系列铧式犁是我司根据国外客户要求设计研发的，与四轮拖拉机悬挂连接，主要用于翻耕表层土壤，给表层土壤补充营养，同时兼具除草功能。

This series of moldboard plough is specially designed and manufactured as foreign customer.It is mounted with 4 wheel tractor.The primary purpose of plough is to turn over the upper layer of the soil, bringing fresh nutrients to the surface, while burying weeds. Balanced and smooth driving ability with its wheel, and its coulter options are some of the main features of this product.

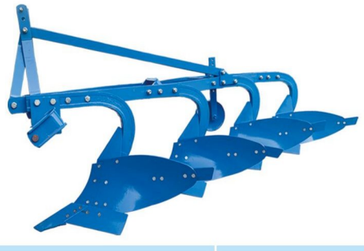



型号 Model	1L-235T	1L-335T	1L-435T	1L-535T
工作宽度 Working Width (mm)	700	1050	1400	1750
工作深度 Working Depth (mm)	230-300			
犁体数量 No. Of bodies	2	3	4	5
重量 Total Weight (kg)	220	340	490	610
配套马力 Tractor power (hp)	50	65	80	95
挂接方式 Mounted Cat	3-Point Mounted			

旋耕机 | 1GQN ROTARY TILLER

1GQN系列旋耕机/旋耕灭茬机是与拖拉机三点悬挂连接配套，采作中间齿轮传动，通过拖拉机后输出PTO进行驱动刀片旋转工作，具有拖拉机轮迹全部覆盖,节省劳动力，土质细碎，综合成本低等特点。

1GQN series of rotary tiller is adopted middle gear transmission system, mounted with the tractor though the 3 point suspension.Tractor’s wheel tracks are completely covered after tillage as the working width is much wider. The quality is reliable and the performance is well. This cultivator can be used on dry and paddy field. It can reduce the time, laboring, and cost, etc.



型号 Model	1GQN-									
	100	125	140	150	160	180	200	220	250	300
工作幅宽 Working width(mm)	1000	1250	1400	1500	1600	1800	2000	2200	2500	3000
工作深度 Working depth(mm)	120-180									
PTO 转速 PTO Rotation speed	540 - 720									
PTO 花键 PTO shaft spline	六键 6 spline									
刀片数量 No.of blades	18	26	30	34	38	42	46	50	58	70
刀片型号 Type of blade	IT225					IT245				
整机重量 Total weight(kg)	190	200	210	220	240	370	400	420	470	500
配套马力 Tractor power (hp)	12	20	25	30	40	50	60	70	80	90
挂接方式 Linkage	I 类三点悬挂 Mounted Cat I					II 类三点悬挂 Mounted Cat II				
选装配置 Items Optional	可选配八键传动轴 PTO transmission shaft in 8 spline									

深松机 | CHISEL PLOW

3S系列深松机是根据国外顾客要求设计的。 它适用于马铃薯、土豆、棉花等农作物的深耕作业。该款深松机能破除硬质土地、、平整土壤、保持地下含水量、清除残渣等。深度可调整，应用范围广，易于操作。

3S series Chisel plow is designed according to the requirements of foreign customers. It is suitable for deep cultivation of potato, soybean, cotton and other crops. The chisel plow can break the hard layer of the soil, level the soil , maintain the water content of the ground, remove residues and so on. Adjustable depth, wide application, easy to operate. It can be adjustable in depth ,applied in wide range and easy to operate.





型号 Model	3S-1.0	3S-1.4	3S-1.8	3S-2.1	3S-2.6
工作宽度 working width(mm)	1000	1400	1800	2100	2600
工作深度 working Depth(mm)	100-350				
齿数 Tine Qty	5	7	9	11	13
整机重量 Total Weight (kg)	240	280	320	370	450
配套马力 Tractor power (hp)	25	30-40	50-60	70-80	80-100
挂接方式 Linkage	I 类三点悬挂 Mounted CAT I		II 类三点悬挂 Mounted CAT II		

中耕机 | CULTIVATOR

该双弹簧中耕机是我公司根据市场需求而研制的新型中耕机，该机采用双弹簧拉紧装置，当中耕机在工作过程中遇到障碍物时能自动弹起，越过后迅速恢复原来的工作状态，从而起到保护犁尖的作用，该机具有行距调整方便，深度调整易行的特点，可适用于棉花、玉米、豆类等松土作业。

The 3ZT series of spring cultivator is developed according to the demand of foreign market. This machine adopts double-spring tension device which enables the tines during operation to bounce when meet with obstacles and return to normal working quickly after over them,by which the tines are protected .It has advantages of row spacing to be conveniently adjusted and the depth to be easily controlled. and the machine is suitable to cultivate and loosen soil in the corn, cotton and beans field.





型号 Model	3ZT-1.0	3ZT-1.4	3ZT-1.8	3ZT-2.2	3ZT-2.5	3ZT-3.0
工作幅宽 Working width(mm)	1000	1400	1800	2200	2500	3000
工作深度 Working depth(mm)	100-250					
齿数 No.of tines	5	7	9	11	13	15
整机重量 Total weight(kg)	260	320	400	490	550	640
配套马力 Tractor power (hp)	25	30-40	40-50	50-70	70-80	80-100
挂接方式 Linkage	Ⅰ类三点悬挂 Mounted CAT Ⅰ		Ⅱ类三点悬挂 Mounted Cat Ⅱ			
选装配置 Items Optional	可选配三角形犁尖 triangle plow tine					




型号 Model	3ZP-5	3ZP-7	3ZP-9	3ZP-11
齿数 Tines Qty	5	7	9	11
机臂类型 Type of arms	Straight 2 curved 3	Straight 3 curved 4	Straight 4 curved 5	Straight 5 curved 6
整机重量 Total Weight((kg)	400	500	550	600
工作宽度 Working width(m)	2.5	2.5	3	3
配套马力 Tractor power (hp)	70	80~90	85`100	85`100
选装配置 Items Optional	可选配三角形犁尖 Straight Chisel Points or Wing Furrower			

中耕机 | CULTIVATOR

3Z 系列中耕机可用于玉米、大豆、棉花、薯类等作物的田间中耕作业，能够一次性完成中耕、深松、开沟、起垄等农田作业。具有行距调整方便，深度控制灵活，起垄宽度调整便捷，使用范围广等特点。

3Z series of cultivator can be used for inter-cultivation on the field of corn ,soybean,cotton ,potato and so on.

It can finish the field work at one time ,such as inter-cultivation ,subsoil ,ditching ,ridging and so on. It has features of convenient adjustment of row spacing ,flexible depth control, easy adjustment of ridging width, wide range of use and so on.

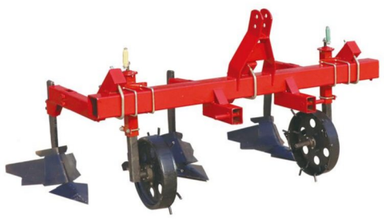




型号 Model	3Z-2	3Z-3	3Z-4	3Z-5
工作宽度 working width(mm)	1100	1900	2900	3700
工作深度 working Depth(mm)	100-200			
齿数 Tine Qty	2	3	4	5
起垄行数 Ridging Rows	1	2	3	4
整机重量 Total Weight (kg)	90	120	150	190
配套马力 Tractor power (hp)	18	20-30	40-50	70-80
挂接方式 Linkage	Ⅰ类三点悬挂 Mounted CAT Ⅰ		Ⅰ类三点悬挂 Mounted CAT Ⅰ	

中耕机 | DOUBLE COIL CULTIVATOR

本系列中耕机是根据国外客户的要求设计和研发的。 该新设计的目的是为了防止耕作过程中，（机器）被以前的农作物残留物或杂草限制。不论土壤类型如何，这些尖齿能够缓冲阻力，并有效地承受各种变形力量。

This series of cultivator is designed and developed as the foreign customer’s requirement.The purpose of new design is to prevent trapping of previous crop residue or weed with tine during ploughing operation. The tines are able to absorb shock and efficient to withstands any distorting forces while ploughing irrespective of soil types.

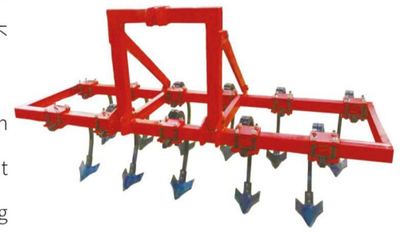



型号 Model	Unit	3ZT-9A	3ZT-11A	3ZT-13A	3ZT-15A
齿数 Tine qty		9	11	13	15
工作宽度 Working width	mm	2000	2500	3000	3500
工作深度 Working depth	mm	350	350	350	350
整机重量 Total Weight	Kg	375	460	540	625
配套马力 Tractor power	hp	40~60	60~80	80~100	100~120
挂接类型		三点悬挂 3-Point Mounted			

起垄机 | DISC RIDGER

3Z系列圆盘式起垄机主要适用于农田耕后起垄作业。该机由方管焊接整体式刚性机机架，三点悬挂架以及圆盘构成，圆盘犁片采用优质65锰弹簧钢，经热处理加工精制而成。该机具有结构合理、坚固耐用、运输方便、便于调整、使用维护方便等特点。

3Z series of disc ridger is suitable for ridging after the tillage in the farm field.it consists of heavy duty tubular box frame, 3 point hitch system and discs. The disc blades are made after the heat treatment in the material of 65Mn spring steel that has better hardness. The machine is reasonable for construction, conveniently to transport, easy to adjust, and conveniently to use and maintain.







型号 Model	3Z-120	3Z-180	3Z-140	3Z-260
犁片数量 Disc Qty	2	4	2	4
犁片直径 Disc Dia. (mm)	510		660	
起垄行数 Ridging Rows	1	2	1	2
起垄宽度 Ridging Width (mm)	300-800	300-1000	500-800	500-2000
起垄高度 Ridging Height	150-260		150-300	
整机重量 Total Weight (kg)	140	200	320	380
配套马力 Tractor power (hp)	20-40	50-70	50-80	90-110
挂接方式 Linkage	I 类三点悬挂 CAT I		II 类三点悬挂 CAT II	

开沟起垄机 | DITCHING RIDGER

3QL系列开沟起垄犁主要适用于土豆、蔬菜的耕后起垄。该产品可自由调节垄间距、起垄高度、起垄行数和起垄宽度。配套马力广，有良好的适应能力。

3QL series of ditching ridger is mainly used for ridging on f potato ,beans and vegetables filed after cultivation. It can adjust freely the ridging spacing ,height ,rows and width. It can be used for tractors of wide range of power with better adaptability.






型号 Model	3QL-1	3QL-2	3QL-3	3QL-4	3QL-5
犁体个数 Plow Body Qty	1	2	3	4	5
工作幅宽 Working Width (mm)		1200	2100	2800	3500
工作深度 Working Depth(mm)	100-240				
行间距 Row Spacing(mm)		500-800			
整机重量 Total Weight (kg)	60	100	150	200	280
配套马力 Tractor power (hp)	20	20	25	40	50-60
挂接类型 Linkage	三点悬挂 3-Point Mounted				

起垄机 | TYNE RIDGER



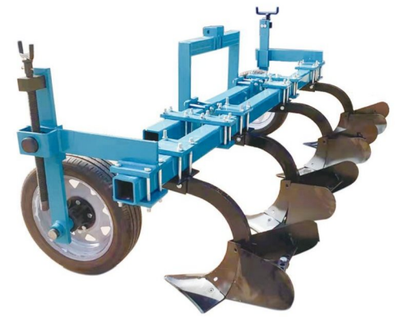

型号 Model	Unit	3QL-3T	3QL-4T	3QL-5T
犁体个数 Tyne Qty		3	4	5
工作宽度 Working width	Mm	2500	3200	3900
起垄间距 Ridging spacing	Mm	700~900		
起垄高度 Ridging height	Mm	150-300		
配套马力 Tractor power (hp)	Hp	60	80	100
挂接方式 Linkage		3-Point Mounted		
选装配置 Items Optional		Tyres		

平地机 | REAR BLADE

平地机是一种利用刮刀平整地面的土方机械。动作灵活准确，操纵方便，平整场地有较高的精度，适用于构筑路基和路面、修筑边坡、开挖边沟，也可搅拌路面混合料、扫除积雪、推送散粒物料以及进行土路和碎石路的养护工作。

This mounted rear blade is mainly used for constructing the roadbed and road surface, ditching the side slope, mixing road mixtures, removing snow, transporting grain materials and maintaining the dirt roads and gravel roads, etc.

It can be lifted, sloped, revolved and extended.,which makes this machine flexible ,accurate and easy to use.



型号 Model	RB-4	RB-5	RB-6	RB-7	RB-8	RB-9
工作宽度 Working Width(mm)	1200	1500	1800	2100	2400	2600
整机重量 Total weight(kg)	150	180	210	240	270	300
配套马力 Tractor power (hp)	20	30	40	50	60	70
挂接方式 Linkage	三点悬挂 3-Point Mounted					

液压平地机 | HYDRAULIC REAR BLADE

液压平地机是一种利用刮刀平整地面的土方机械。动作灵活准确，操纵方便，平整场地有较高的精度，适用于构筑路基和路面、修筑边坡、开挖边沟，也可搅拌路面混合料、扫除积雪、推送散粒物料以及进行土路和碎石路的养护工作。

This mounted hydraulic rear blade is mainly used for constructing the roadbed and road surface, ditching the side slope, mixing road mixtures, removing snow, transporting grain materials and maintaining the dirt roads and gravel roads, etc. It can be lifted, sloped, revolved and extended.,which makes this machine flexible ,accurate and easy to use.



型号 Model	HRB-1.8	HRB-2.1	HRB-2.4	HRB-2.7	HRB-3.0
工作宽度 Working Width (mm)	1800	2100	2400	2700	3000
整机重量 Total weight (kg)	290	305	330	360	390
配套马力 Tractor power (hp)	40-50	50-70	60-85	80-120	90-140
挂接方式 Linkage	二类三点悬挂 Munted Cat II				

箱式平地机 | BOX GRADER BLADE

箱式平地机是用来疏土，平地，设计标高和回填的理想设备。相较于一般平地机，箱式平地机因为有箱体，效率高很多，而且更容易控制，保留切割材料。

This box grader blades are ideal for ripping, leveling, finish grading, and backfilling applications .Box blades are a lot more effective than just a standard scraper/grader blade as the 'boxed in' sides allow for better control and retention of the cut material.





型号 Model	单位 Unit	BGB-4	BGB-5	BGB-6	BGB-7	BGB-8
工作幅宽 Working Width	m	1200	1500	1800	2100	2400
整机重量 Total Weight	kg	180	200	230	260	300
配套马力 Tractor power (hp)	hp	20	30	40	50	60
挂接方式 Linkage		I类三点悬挂 Mounted CAT I				

耙地机 | TRACTOR LANDSCAPE RAKE

LR耙地机主要适用于开荒后土壤的碎土以及耕后平整地表的工作，耙齿采用65锰弹簧钢经热处理制成，具有弹性好，强度高，耐磨性好等特点。

This landcaspe rake is mainly used for raking weeds on the uncultivated field surface and the shallow layer of cultivated land. The rake fingers, which are made of 65Mn steel through heat treatment, have the advantages of good elasticity, high strength and good abrasion resistance.







型号 Model	LR-4	LR-5	LR-6	LR-7	LR-8
工作宽度 Working Width (mm)	1200	1500	1800	2100	2400
整机重量 Total Weight(kg)	120	140	160	190	220
配套马力 Tractor power (hp)	20	30	40	50	60
挂接方式 Linkage	3-Point Mounted				

链耙 | CHAIN HARROW

链耙主要用于清除杂草、树根、平整碎石等作业，是种植作物及铺种草皮前的良好选择；可通过弹簧钩将链耙与ATV车、UTV车、花园拖拉机相连，拖动链耙进行工作；作业后，可简单地卷起来存放于任何地方。

The chain rake is mainly used to remove weeds, tree roots, stone leveling and other operations,and it is a good choice before planting crops and laying turf; This chain rake shall work after you connect it with your ATV, UTV, and garden tractor by a spring hook and then you can roll it up simply to store anywhere.

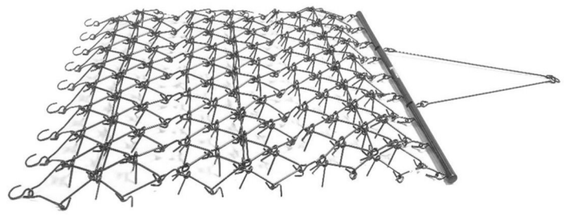

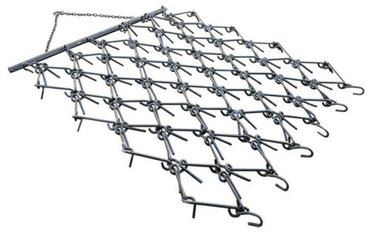

型号 Model	DC-4FT	DC-6FT	DC-8FT	DC-10FT
耕幅 Working Width (mm)	1220	1830	2440	3050
链条长度 Chain Length (mm)	1220			
链条直径 China Dia.(mm)	12/16mm			
整机重量 Total Weight (kg)	80/110	100/135	120/150	150/190
配套马力 Tractor power (hp)	25-35	35-40	45-60	70

钉齿耙 | SPIKE TOOTH HARROW



钉齿耙是一种场地准备机械，主要工作配件是钉齿。钉齿固定在耙架子上，由于其楔形结构和钉齿对土壤的压力，使得其有较好的碎土能力，。并能去除小草，适用于柔软土壤。

Spike-tooth harrow is a kind of ground preparation machine with nail teeth as its working part. Nail teeth fixed on the harrow frame, because of the wedge and impact of nail teeth on the soil, the ability of crushing soil is better, and can remove young weeds, suitable for use in soft soil.

型号 Model	BDC-4	BDC-5	BDC-6	BDC-7	BDC-8
工作宽度 Working Width(mm)	1200	1500	1800	2100	2400
整机重量 Total Weight(kg)	120	140	160	190	220
配套马力 Tractor power (hp)	20	30	40	50	60
挂接方式 Linkage	3-Point Mounted				

玉米播种机 | CORN SEEDER CUM FERTILIZER

该机与拖拉机配套作业，主要用于免耕地单粒精播或双粒精播玉米（可根据您的需求选择），可条施晶粒状化肥，一次完成开沟排种器播种精度高，粒数合格指数达到80%以上。单粒播种效果极为准确，不仅节省籽种，真正实现了播种行业的一次创新革命。

This kind of precision corn seeder/corn drill must match with the four-wheel types tractors, which is used for seeding the single seed or double seeds accurately (as your choice). The corn drill also sow the crystalline granule fertilizer while seeding. Which can finish furrowing, fertilizing, seeding, covering earth, pressing etc. The effect of Single grain sowing is extremely accurate, that is save seeds; truly achieve a revolutionary innovation in planting industry.





型号 Model	2BGYF-2	2BGYF-3	2BGYF-4	2BGYF-5	2BGYF-6	2BGYF-7
工作深度 Seeding Depth (mm)	50-100					
工作行数 Seeding Rows(mm)	2	3	4	5	6	7
行距 Row spacing (mm)	500-620					
株距 Planting distance (mm)	120-320					
配套马力 Tractor power (hp)	15	20	30	40	50	60
重量 Weight (kg)	140	185	245	310	370	470
挂接方式 Linkage	Ⅰ类三点悬挂 Cat Ⅱ			Ⅱ类三点悬挂 Cat Ⅱ		

玉米脱粒机 | CORN THRESHER /MAIZE SHELLER

该系列玉米脱粒机是广泛应用于畜牧业,农场,和家庭使用。玉米脱粒机主要用于玉米剥皮脱粒，该脱粒机以惊人的速度在不损坏玉米棒的情况下将玉米粒从玉米棒分离。脱粒机可以配套两种不同的动力:柴油机或电动机。您可以根据实际情况进行选择。有配套的轮胎动力支撑架便于运输。850型脱粒机可实现大容量撕皮脱粒，撕皮脱粒同时进行，脱出的玉米粒不影响播种效果。

Our corn /maize thresher is widely applied for livestock breeding, farms, and household use. It is used for shelling Maize from cobs. The machine separates the kernels from the cobs with an amazing speed without any breakage of the kernels as well as cobs.This maize threshing machine is quite simple with high output. It is also very easily transportable because of own wheel and related frame.





型号 Model	5TY-650	5TY-850
生产效率 Efficiency(kg/h)	1500-2000	4500-6000
脱净率 Threshing Rate(%)	99	99
破碎率 Breakage Rate(%)	1	1
主轴转速 Rotation Speed of Main shaft(r/m))	1000	1000
整机重量 Total Weight(kg)	70	130
配套马力 Tractor power (hp)	5-8	12-15
选装配置 Item Optional	电机或柴油机 Electric motor or Diesel	电机或柴油机或拖拉机 PTO Electric motor or Diesel engine or Tractor PTO

马铃薯播种机 | POTATO PLANTER CUM FERTILZER

2CM型马铃薯种植机，采用国外生产马铃薯机械的先进技术，经反复试验，改进而研究成功的一种小型马铃薯种植机，2CM型马铃薯种植机同小型拖拉机配套使用，集开沟、施肥、播种和覆土为一体，可一次完成施肥、播种作业。具有结构紧凑、机动性好、布局合理、工作平稳、适应性强、维修简单等特点，可根据不同地区的农艺种植要求，调整深浅、行距和株距。

The potato planter is designed according to the foreign advanced technology, it matches with four-wheel tractor and combine ditch, manure, sowing, casing soil, complete manure and sowing simultaneously. This machine has the compact structure, better motility, reasonable layout, stable working, well-adapted, simple maintenance and it is easy to be installed. The seeding depth, row spacing could be adjusted to meet different planting request.





型号 Model	2CM - 1	2CM - 2A	2CM - 2	2CM - 4	2CM - 4
播种 数 Planting rows (mm)	1	2	2	4	4
起垄行数 Ridging of rows	1	1	2	2	4
行距 Row spacing (mm)	-	100	500-800	500-1000	500-1000
株距 Planting distance (mm)	250-330				
整机重量 Weight (kg)	150	200	230	380	430
配套马力 Tractor power (hp)	20-30	30-40	30-40	50-90	50-90
挂接方式 Linkage	Ⅰ类三点悬挂 Mounted Cat Ⅰ			Ⅱ类三点悬挂 Mounted Cat Ⅱ	

马铃薯收获机 | POTATO HARVESTER/DIGGER

4U系列马铃薯收获机通过后马力或者侧马力传动方式配套于20-100hp拖拉机。该土豆收获机用于土豆挖掘，将块茎部分从土壤中分离，从而使马铃薯脱离根茎到达地面便于拾捡。配有三角搅拌器。该工作原理是在拖拉机PTO传动下，通过振动筛震动使土壤和块茎分离，土壤在振动筛间隙掉落，留在振动筛上的马铃薯则通过振动筛的震动落在后面土地上。

4U series of sweet potato harvester is mounted with the tractor of 20-100hp with back power and side power output shaft. Our tractor potato harvester is intended for potato excavation , tubers partial separation from the soil and tubers laying on field surface for their further picking up. A triangular beater is set on the potato harvester. The working principle of this potato digger is that the digging shovel digs up the soil and crops through the impetus of the tractor. And the digging shovel make crop and soil separate though vibration sieve, the soil first drip down from the clearance of vibration sieve, finally the crop crashed down on to the road from the back.





型号 Model	4U-1	4U-2
收获行数 Harvesting rows	1	2
工作幅宽 Working width(mm)	600	900/1300/1600/1800
工作深度 Working Depth (mm)	100 - 250	
PTO 转速 PTO Rotation speed	540 - 720	
整机重量 Weight(kg)	160	260/335/390/450
配套马力 Tractor power (hp)	20 - 30	40/50/70/90
挂接方式 Linkage	I 类三点悬挂 Cat I	II 类三点悬挂 Cat II

蔬菜播种机 | VEGETABLE SEEDER

2BS系列蔬菜播种机具有播种精度高，种子破损率低等优点，主要针对油菜、芝麻、苜蓿、洋葱、番茄、辣椒、菜心、谷子、莴苣、胡萝卜等小粒种子作物。

This vegetable seeder has advantages in high seeding precision ,lower seed breakage and so on. It is mainly used for the small seeds such as rape, carrot, sesame, clover, onion, tomato, chili,flowering cabbage and so on .





型号 Model	2BS-8	2BS-10	2BS-12	2BS-14	2BS-16
工作宽度 Working width(mm)	1800	1900	2000	2160	2300
工作深度 Working Depth(mm)	5-10				
播种行数 Seeding Rows	8	10	120	14	16
行距 Row Spacing(mm)	20-25	12-15			
株距 Plant Distance(mm)	5-150				
整机重量 Total Weight (kg)	220	240	270	280	300
配套动力 Tractor Power (hp)	20-50	30-50	30-50	30-70	30-70
选装配置 Item Optional	滚筒式或者螺旋式 ,化肥箱 Roller Type or Auger Type , Fertilizer Box,				

鼓式割草机 | DRUM MOWER

本系列割草机主要适用于农、林、牧区小面积草场和山地丘陵草场，用以收割天然和种植牧草。该机具具有结构简单、操作方便、割刀切割有力、割茬低且整齐、使用可靠等特点。

This rotary drum mower is mainly used for cutting the natural and planted grasses in ranch, mountain and hilly area. The structure of this machine is compact and the operation is easy and reliable and the residues are lower after cutting.






型号 Model	DM-125	DM-135	DM-165	DM-185
割草宽度 Cutting Width (mm)	1250	1350	1650	1850
割茬高度 Cutting Height Adjust.(mm)	30	30	30	30
运输宽度 Transportation Width(mm)	850	950	140	160
运输长度 Transportation Length(mm)	2550	2650	2850	3050
高度 Height	1100	1100	1100	1100
重量 Weight	330	350	400	440
刀盘数量 Drums(pcs)	2	2	2	2
刀片数量 Blades(pcs)	6	6	6	6
传动轴速度 P.T.O Drive Shaft	With	With	With	With
悬挂类型 Mounted Cat	Cat I	Cat I	Cat I/II/III	Cat I/II/III
配套动力 Tractor Power(hp)	≥20	≥30	≥45	≥60
选装配置 Item Optional	液压 Hydraulic			

镰刀割草机 | SICKLE BAR MOWER

9G型后悬挂割草机用偏置式曲柄连杆机构驱动割刀进行割草作业。及适用于农、林、牧区小面积草场和山地丘陵草场，用以收割天然和种植牧草。该机具具有结构简单、操作方便、割刀切割有力、割茬低且整齐、使用可靠等特点。

Model 9G series of sickle bar mower takes advantage of the offset crank link mechanism to drive the cutter blade mow grass, and it is adequate for cutting the natural and planted grasses in ranch, mountain and hilly area. The structure of this machine is compact and the operation is easy and reliable and the residues are lower after cutting.

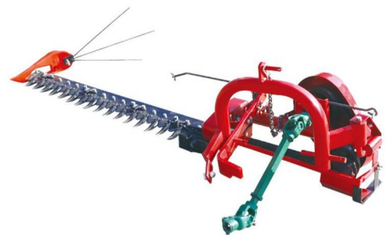



型号 Model	9G-1.4	9G-1.6	9G-1.8	9G-2.1
工作幅宽 Cutting Width(mm)	1400	1600	1800	2100
割茬高度 Cutting Height (mm)	50-80			
PTO 转速 PTO speed (r/min)	540			
整机重量 Weight (kg)	120	124	128	135
配套马力 Tractor power (hp)	12-20	15-20	20-30	20-30
挂接方式 Mounted cat	I 类三点悬 Cat I			

割搂一体机 | MOWING HAY RAKE

9GBL系列割搂草机利用偏置式曲柄连杆机构驱动割刀进行割草作业的同时搂草机构将草搂集在一起。主要适用于农牧区草场,山地、丘陵草场的天然牧草和种植牧草的收割及收集作业。

Model 9GBL series cutting and raking machine take advantage of the offset crank link mechanism to drive the cutter blade mow grass simultaneously and the raking mechanism rake the grass together. And the machine is adequate for cutting the natural and planted grasses in ranch, mountain and hilly area.

型号 Model	9GBL-1.4	9GBL-1.6	9GBL-1.8	9GBL-2.1
工作幅宽 Cutting Width(mm)	1400	1600	1800	2100
割茬高度 Cutting Height (mm)	50-80			
PTO 转速 PTO speed (r/min)	540			
整机重量 Weight (kg)	280	300	320	340
配套马力 Tractor power (hp)	12-20	15-20	20-30	20-30
挂接方式 Mounted cat	牵引 Trailed			



旋转割草机 | MOWER

9GX系列旋转型割草机主要适用于草场、灌木林地的割草、清理以及地表不平整牧场的更新、改造等作业。 本产品与拖拉机全悬挂配套,可通过支撑轮和侧板调节割草高度。

Series of 9GX mower is mainly applicable for grassland, shrub land and field with rough surface. It Uses offset brace Mounted cat machine to drive knife. This mower is mainly applicable for farm land, field grassland, mountains, natural grazing and planted grazing. With reasonable structure; simple and reliable to use, etc.







型号 Model	9GX-1.0	9GX-1.2	9GX-1.5	9GX-1.8	9GX-2.1	9GSX-2.4	9GSX-3.0
工作幅宽 Cutting Width(mm)	1000	1200	1500	1800	2100	2400	3000
割茬高度 Cutting Height (mm)	30-50						
PTO 转速 PTO speed (r/min)	540						
整机重量 Weight (kg)	235	280	335	440	520	580	700
配套马力 Tractor power (hp)	25-40	30-40	40-60	70-80	90	80	100
挂接方式 Mounted cat	三点悬挂 Three-point mounted						

撒肥机 | FERTILIZER SPREADER

该系列撒肥机主要适用于农田耕前撒播底肥、耕后播种及草场、牧场的种肥混合撒播作业。配套马力18~100马力，播幅7M-15M。该机结构紧凑、性能优良、适用范围广、作业效率高、种肥撒播均匀等特点。

This fertilizer spreader is mainly used for spreading fertilizer, sowing seeds and mixture of fertilizer and seeds. With 25-60 horsepower, 16M-30M sowing rate, compact structure, high performance, wide application, and high efficiency, uniform broadcast sowing, etc.





型号 Model	CDR-230	CDR-400	CDR-600	CDR-800	CDR-1000
工作幅宽 Spreading Width (m)	7-15				
肥箱容积 Capacity of fertilizer box (L)	230	400	600	800	1000
PTO 转速 PTO speed (r/min)	540				
整机重量 Total Weight (kg)	65	80	160	290	340
配套马力 Tractor power (hp)	18 - 30	25-55	50-60	60-80	80-100
挂接方式 Mounted cat	三点悬挂 3-Point Mounted				

喷雾机 | BOOM SPRAYER

3W系列喷雾机主要用于大豆,玉米,棉花,小麦,水稻等旱田水田的施药,同时也适用于草坪,果树,茶树,蔬菜,路旁树等药物喷洒工作。产品容量从500L-1000L,喷幅8m-12m,配套30-120hp拖拉机。

3W series of sprayer is suitable for spraying the medicament for the planter of bean, corn, cotton, grain. Also for lawn, fruiter, vegetable, road side tree. The capacity could be 500L-1000L, the spraying width could be 8m-12m with 30-120hp tractor.





型号 Model	3W-500	3W-600	3W-800	3W-1000
工作宽幅 Width of spraying(m)	8/10	8/10	8/10/12	8/10/12
药箱容积 Case volume (L)	500	600	800	1000
PTO 转速 PTO speed (r/min)	540			
整机重量 Weight (kg)	200-300			
配套马力 Tractor power (hp)	30-60	40-80	50-90	80-120
喷雾泵 Spray Pump	隔膜泵 Diaphragm pump			
挂接方式 Mounted cat	三点悬挂 3-Point Mounted			

挖坑机 | POST HOLE DIGGER



1W系列挖坑机能与各种型号拖拉机配套使用，适用于大面积、大规模的植树作业，也可广泛应用于田间地头，道路两侧绿化，沟河堤坝防汛植树任务。该机结构新颖、灵活、合理，性能稳定可靠，作业效果、效率高，深受广大用户喜欢。该机可根据树种，，选配多种规格的钻头，以满足客户需要。

1W serious of hole digger can be fitted with various models of tractors. It is suitable for planting trees of large area and large scale, and can be widely used for tree planting on fields ,greenbelt of both sides of road and dam flood prevention.

型号 Model	1W-30	1W-40	1W-50	1W-60	1W-70	1W-80	1W-100
挖坑直径 Digging Dia.(mm)	300	400	500	600	700	800	1000
挖坑深度 Digging Depth(mm)	600	600	600	600	800	800	900
整机重量 Total Weight(kg)	200	240	280	320	350	380	420
PTO 转速 PTO speed (r/min)	540-720						
配套马力 Tractor power (hp)	25	30	45	50	75	80	100

开沟机 | DITCHING MACHINE

此系列开沟机是根据国外客户要求专门设计、制造的,同拖拉机全悬挂连接配套,主要用于构造、清理河道及排水沟。该机结构简单，坚固耐用，使用方便，保养宜行，入土能力良好。

This series disc plough is specially designed and manufactured as the requirements of foreign customers .It is maily used to make and clean water courses and drainage ditches .It can create a v-shaped ditch using hardened steel cutting edges. The cutting point and wings are replaceable.





型号 Model	1KG-150	1KG-200
工作宽度 Working Width (mm)	1500	2000
犁尖和刀片 Points and Blades	可替换 Replaceable	
重量 Weight (kg)	170	280
配套马力 Tractor power (hp)	40-100	100-120
挂接方式 Linkage	3 Point Mounted	

农用拖车 | AGRICULTURAL TRAILERS



该系列农用拖车主要配套12-120hp四轮拖拉机，适用于山地、平原、山区、沼泽、丘陵、农村以及公路运输各类散装货物，该类车型结构牢固、造型美观、安全可靠、经久耐用，可分为自卸型和不自卸型。

The single axle farm trailer is used for 12-120hp 4-wheels tractor, Applicable for transporting various bulk cargoes in plains, mountains, wetlands, knap, rural area and highway, with the feature of solid structure; beautiful, safe, reliable, durable. It is included in two types: dumping trailer and not dumping trailer.






型号 Model	车厢尺寸 LxWxxH Box Size(mm)	载重 Load (kg)	轮胎型号/数量 Tyre Model/Qty	卸料形式 Tipping	整机重量 Weight (kg)	配套动力 TractorPower(hp)
7C-1.5	2000X1000X400	1500	6.50-16/2	非自卸 No Tipping	300	12--25
7CX-1.5	2000X1000X400	1500	6.50-16/2	自卸后翻 Rear Tipping	350	12--25
7C-2	2400X1200X400	2000	6.50-16/2	非自卸 No Tipping	360	12-25
7CX-2	2400X1200X400	2000	6.50-16/2	自卸后翻 Rear Tipping	420	12-25
7CX-2E	2500X1500X450	2000	10.0/75-15.3	自卸后翻 Rear Tipping	600	12-25
7C-2.5	2500X1500X450	2500	7.50-16/2	非自卸 No Tipping	460	18-30
7CX-2.5	2500X1500X450	2500	7.50-16/2	自卸后翻 Rear Tipping	580	18-30
7C-3	3000X1600X450	3000	7.50-16/2	非自卸 No Tipping	500	25-40
7CX-3	3000X1600X450	3000	7.50-16/2	自卸后翻 Rear Tipping	650	25-40
7C-3	3400X1700X450	3000	7.50-16/2	非自卸 No Tipping	600	25-40
7CX-3	3400X1700X450	3000	7.50-16/2	自卸后翻 Rear Tipping	750	25-40
7C-4	3800X1700X450	4000	7.50-16/4	非自卸 No Tipping	1150	35-40
7CX-4	3800X1700X450	4000	7.50-16/4	左右自卸 Side Tipping	1450	35-40
7C-5	4000X2100X550	5000	8.25-16/4	非自卸 No Tipping	1260	40-60
7CX-5	4000X2100X550	5000	8.25-16/4	左右自卸 Side Tipping	1610	40-60
7CX-5E	3700X1900X(460+460)	5000	400/60-15.5/2	自卸后翻	1400	40-60
7C-6	4500X2100X550	6000	8.25-16/4	非自卸	1400	50-90
7CX-6	4500X2100X550	6000	8.25-16/4	左右自卸	1900	50-90
7C-8	5500X2100X550	8000	9.00-16/4	非自卸	2050	60-100
7CX-8	5500X2100X550	8000	9.00-16/4	左右自卸	2600	60-100
7CX-8E	4100x2100X(550+550)	8000	11.5/80--15.3/4	三向自卸	3500	60-100
7C-10	6000x2100x550	10000	8.25-16/8	非自卸	2700	80-120

犁（耙）片 | DISC BLADE

我司拥有先进的犁（耙）片锻造、机加工、热处理、涂装等全套生产线，生产直径280~960mm，材料厚度3~12mm，主要材料有65Mn和硼钢两种，其中65Mn HRC 38-44 ； 硼钢 HRC48-52,性能稳定，质量可靠，并可根据客户提供的图纸、样品或技术要求进行加工定制。

We have complete advanced production line for disc blades ,like forging ,machining,heat treatment, powder coated painting and so on.The disc diameter is available from 280 to 960mm, and thickness from 3 to 12mm. We mainly use 65Mn and boron steel,with respective HRC 38-44 and 48-52 , which give the discs stable performance and reliable quality. Custom made service is available to be done as your drawing ,sample or technical requirement.

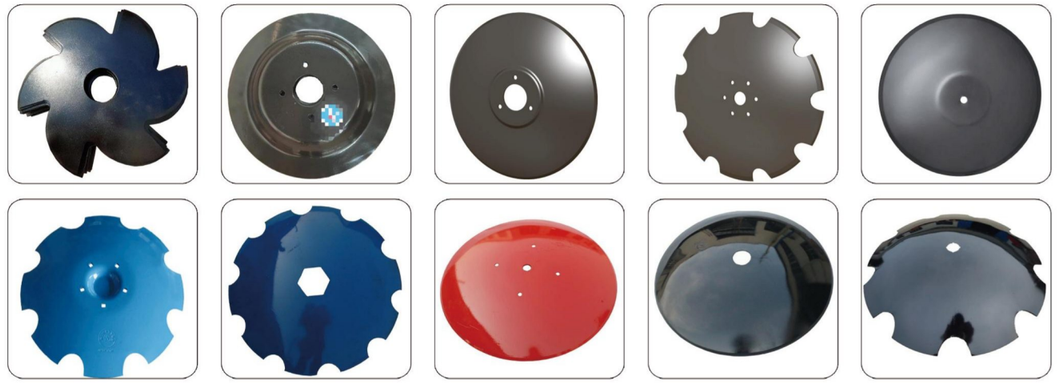





直径 Diameter	厚度 Thickness(mm)	Approx.Weight (kg)	直径 Diameter	厚度 Thickness(mm)	Approx.Weight (kg)	直径 Diameter	厚度 Thickness(mm	Approx.Weight (kg)
12"/305mm	2	1.04	18"/460mm	3.5	4.14	24"/610mm	4.5	10.32
	2.5	1.28		4	4.77		5	11.38
	3	1.59		4.5	5.39		6	13.54
	4	1.90		5	5.93		7	15.80
	5	2.40		6	7.05		8	18.00
14"/355mm	3	2.03	20"/510mm	3.5	5.39	26"/660mm	5	13.83
	3.5	2.36		4	6.18		6	16.63
	4	2.71		4.5	6.96		7	19.39
	4.5	3.05		5	7.65		8	22.13
	5	3.36		6	9.08	28"/710mm	6	19.53
15"/381mm	4	3.48	22"/560mm	4	7.65		7	22.79
16"/406mm	3	2.86		4.5	8.62		8	26.01
	3.5	3.32		5	9.49	30"/760mm	6	22.15
	4	3.82		6	11.28		8	29.53
	4.5	4.30	18"/460mm	3.5	4.14		10	36.33
	5	4.74		4	4.77	32"/810mm	8	34.22
34"/864mm	12	54.50	36"/910mm	12	63.40		10	42.15

松土铲 | CULTIVATOR SWEEP

松土铲是中耕机的主要配件和常用易损配件，目前我司主要使用材料为65Mn、60Si2Mn和硼钢，其中65Mn (60Si2Mn)HRC 38-44 ； 硼钢 HRC48-52,性能稳定，质量可靠，并可根据客户提供的图纸、样品或技术要求进行加工定制。


Cultivator sweep is the main parts and common spare parts of cultivator. We mainly use 65Mn ,60Si2Mn and boron steel,with respective HRC 38-44 and 48-52 , which give the parts stable performance and reliable quality. Custom made service is available to be done as your drawing ,sample or technical requirement.




























Ref.	→||←	A	B	D	C	N.W
SH-S85-0667	6	178	231	103	44	1.23KG
SH-S85-0669	6	229	231	103	44	1.47KG
SH-S85-0406	6	228	203	90		1.3KG
SH-LK-4X-7H	6	177	201	90		1.0KG
SH-92411	6	279	260	90	44	1.26KG
SH-S85-0522	6	54	247			0.75KG
SH-S85-0404	6	114	201	90		0.91KG
SH-CC061	8	44.4	262	38	50	0.66KG
SH-CC03	8	44.4	262	38	50	0.61KG
SH-TC125L	3	76	546		57	3.38KG
SH-P57-0260	6	50	499	101	60	3.9KG
SH-45522		50	420		56.8	2.42KG

定制产品 | CUSTOM MADE MACHINES















定制配件 | CUSTOM MADE PARTS



